

## Needlepoint Style: Plasma BAR X


**VOLTAGE**  
120V / 230V

**LENGTH**  
18" - 144"

**ENERGY USE**  
2.2 TO 11.5VA

**DRY CONTACTS**  
Integral BAS

**CAPACITY**  
Up to 30,000 CFM

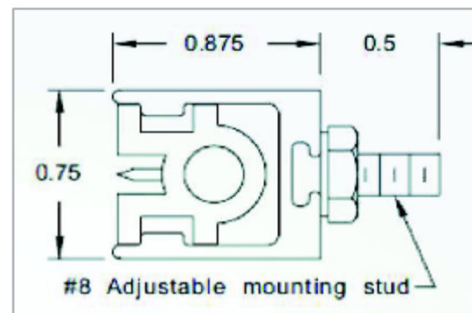

### DESCRIPTION

Narrower bar designed to be mounted on entering side of cooling coil in AHU or RTU.

No maintenance.

Recessed needles to avoid shock.

BAS separate with duct ion sensor.

Ideal for larger systems serving office spaces, lobbies, conference spaces and hospitals