

Needlepoint Style: 7000 Series

VOLTAGE

24V / 120V / 230V

ENERGY USE

1 / 2 / 3 / 4 Watts

NEEDLE PAIRS


1 / 2 / 3 / 4

DRY CONTACTS

Integral

CAPACITY

1,400 - 6, 000 CFM

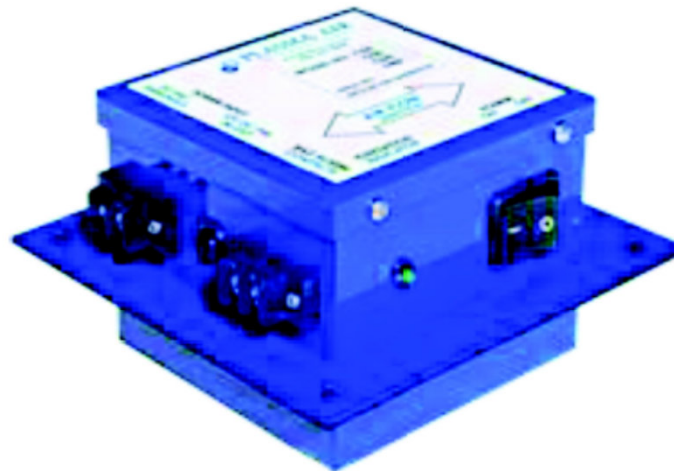

DESCRIPTION

Mounted in-duct or inside AHU.

No maintenance.

Unit will accept 24V AC directly or can be used with 120V/230V AC power supply.

Dry contacts for BAS alarm.

Can be daisy-changed for higher airflows.

Ideal for lower pollutant load projects.